



FHP V-Belt

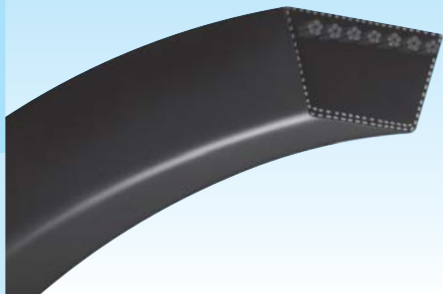

- Designed for light duty, fractional horsepower drives.
- Capable of handling drives with backside idler.
- External wrapping provides a smooth and quiet operation with minimum vibration.
- Heat and oil resistant, static conductive.

Cross-Sectional Dimensions

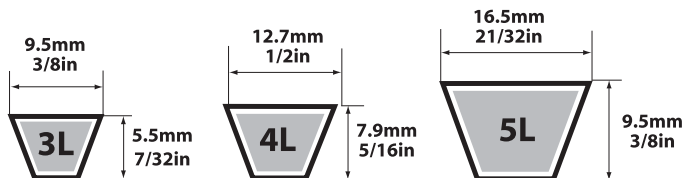

Product Code

4L - 380

Cross Section

Belt Code, 38.0 inches

3L			
Belt No.	Outside Length (Inch)	Belt No.	Outside Length (Inch)
3L 110	11.0	3L 710	71.0
3L 120	12.0	3L 720	72.0
3L 130	13.0	3L 730	73.0
3L 140	14.0	3L 740	74.0
3L 150	15.0	3L 750	75.0
3L 160	16.0	3L 760	76.0
3L 170	17.0	3L 770	77.0
3L 180	18.0		
3L 190	19.0		
3L 200	20.0		
3L 210	21.0		
3L 220	22.0		
3L 230	23.0		
3L 240	24.0		
3L 250	25.0		
3L 260	26.0		
3L 270	27.0		
3L 280	28.0		
3L 290	29.0		
3L 300	30.0		
3L 310	31.0		
3L 320	32.0		
3L 330	33.0		
3L 340	34.0		
3L 350	35.0		
3L 360	36.0		
3L 370	37.0		
3L 380	38.0		
3L 390	39.0		
3L 400	40.0		
3L 410	41.0		
3L 420	42.0		
3L 430	43.0		
3L 440	44.0		
3L 450	45.0		
3L 460	46.0		
3L 470	47.0		
3L 480	48.0		
3L 490	49.0		
3L 500	50.0		
3L 510	51.0		
3L 520	52.0		
3L 530	53.0		
3L 540	54.0		
3L 550	55.0		
3L 560	56.0		
3L 570	57.0		
3L 580	58.0		
3L 590	59.0		
3L 600	60.0		
3L 610	61.0		
3L 620	62.0		
3L 630	63.0		
3L 640	64.0		
3L 650	65.0		
3L 660	66.0		
3L 670	67.0		
3L 680	68.0		
3L 690	69.0		
3L 700	70.0		

4L			
Belt No.	Outside Length (Inch)	Belt No.	Outside Length (Inch)
4L 150	15.0	4L 750	75.0
4L 160	16.0	4L 760	76.0
4L 170	17.0	4L 770	77.0
4L 180	18.0	4L 780	78.0
4L 190	19.0	4L 790	79.0
4L 200	20.0	4L 800	80.0
4L 210	21.0	4L 810	81.0
4L 220	22.0	4L 820	82.0
4L 230	23.0	4L 830	83.0
4L 240	24.0	4L 840	84.0
4L 250	25.0	4L 850	85.0
4L 260	26.0	4L 860	86.0
4L 270	27.0	4L 870	87.0
4L 280	28.0	4L 880	88.0
4L 290	29.0	4L 890	89.0
4L 300	30.0	4L 900	90.0
4L 310	31.0	4L 910	91.0
4L 320	32.0	4L 920	92.0
4L 330	33.0	4L 930	93.0
4L 340	34.0	4L 940	94.0
4L 350	35.0	4L 950	95.0
4L 360	36.0	4L 960	96.0
4L 370	37.0	4L 970	97.0
4L 380	38.0	4L 980	98.0
4L 390	39.0	4L 990	99.0
4L 400	40.0	4L 1000	100.0
4L 410	41.0	4L 1010	101.0
4L 420	42.0	4L 1020	102.0
4L 430	43.0	4L 1030	103.0
4L 440	44.0	4L 1040	104.0
4L 450	45.0	4L 1050	105.0
4L 460	46.0	4L 1060	106.0
4L 470	47.0	4L 1070	107.0
4L 480	48.0	4L 1080	108.0
4L 490	49.0	4L 1090	109.0
4L 500	50.0	4L 1100	110.0
4L 510	51.0	4L 1110	111.0
4L 520	52.0	4L 1120	112.0
4L 530	53.0	4L 1130	113.0
4L 540	54.0	4L 1140	114.0
4L 550	55.0	4L 1150	115.0
4L 560	56.0	4L 1160	116.0
4L 570	57.0	4L 1170	117.0
4L 580	58.0	4L 1180	118.0
4L 590	59.0	4L 1190	119.0
4L 600	60.0	4L 1200	120.0
4L 610	61.0		
4L 620	62.0		
4L 630	63.0		
4L 640	64.0		
4L 650	65.0		
4L 660	66.0		
4L 670	67.0		
4L 680	68.0		
4L 690	69.0		
4L 700	70.0		
4L 710	71.0		
4L 720	72.0		
4L 730	73.0		
4L 740	74.0		

5L			
Belt No.	Outside Length (Inch)	Belt No.	Outside Length (Inch)
5L 230	23.0	5L 830	83.0
5L 240	24.0	5L 840	84.0
5L 250	25.0	5L 850	85.0
5L 260	26.0	5L 860	86.0
5L 270	27.0	5L 870	87.0
5L 280	28.0	5L 880	88.0
5L 290	29.0	5L 890	89.0
5L 300	30.0	5L 900	90.0
5L 310	31.0	5L 910	91.0
5L 320	32.0	5L 920	92.0
5L 330	33.0	5L 930	93.0
5L 340	34.0	5L 940	94.0
5L 350	35.0	5L 950	95.0
5L 360	36.0	5L 960	96.0
5L 370	37.0	5L 970	97.0
5L 380	38.0	5L 980	98.0
5L 390	39.0	5L 990	99.0
5L 400	40.0	5L 1000	100.0
5L 410	41.0	5L 1010	101.0
5L 420	42.0	5L 1020	102.0
5L 430	43.0	5L 1030	103.0
5L 440	44.0	5L 1040	104.0
5L 450	45.0	5L 1050	105.0
5L 460	46.0	5L 1060	106.0
5L 470	47.0	5L 1070	107.0
5L 480	48.0	5L 1080	108.0
5L 490	49.0	5L 1090	109.0
5L 500	50.0	5L 1100	110.0
5L 510	51.0	5L 1110	111.0
5L 520	52.0	5L 1120	112.0
5L 530	53.0	5L 1130	113.0
5L 540	54.0	5L 1140	114.0
5L 550	55.0	5L 1150	115.0
5L 560	56.0	5L 1160	116.0
5L 570	57.0	5L 1170	117.0
5L 580	58.0	5L 1180	118.0
5L 590	59.0	5L 1190	119.0
5L 600	60.0	5L 1200	120.0
5L 610	61.0		
5L 620	62.0		
5L 630	63.0		
5L 640	64.0		
5L 650	65.0		
5L 660	66.0		
5L 670	67.0		
5L 680	68.0		
5L 690	69.0		
5L 700	70.0		
5L 710	71.0		
5L 720	72.0		
5L 730	73.0		
5L 740	74.0		
5L 750	75.0		
5L 760	76.0		
5L 770	77.0		
5L 780	78.0		
5L 790	79.0		
5L 800	80.0		
5L 810	81.0		
5L 820	82.0		